


**** (4) MOUNTING HOLES EQUALLY SPACED FOR 3/8"-16 THREADED STUDS, LOCKWASHERS AND NUTS (FOR MTG. THROUGH BRAKE TO MOTOR). STUDS MAY BE SHORTENED IF NO ADDITIONAL EQUIPMENT IS TO BE MOUNTED TO THE BRAKE FACE.

**LOCATING DIMENSION FOR MOUNTING HUB TO MOTOR SHAFT—SEE INSTALLATION INSTRUCTIONS.

****INCLUDED IN PARTS PACKAGE

MODEL NUMBER	NUMBER OF ROTATING DISCS	TORQUE LB.FT.	THERMAL CAPACITY HPS/MIN.	INERTIA OF ROTATING PARTS LB.FT. ²	MAGNET AIR GAP		DIMENSIONS				ENCLOSURE MATERIAL
					ORIGINAL SETTING	MAXIMUM	C*	AC*	X ONE PIECE SHAFT	***X TWO PIECE SHAFT	
4-61001-5153	1	1.5	6	.006	.045/.050	.100	4.94	.59	.81	.88	ALUMINUM
4-61003-5153	1	3	6	.006	.045/.050	.100	4.94	.59	.81	.88	ALUMINUM
4-62006-5153	2	6	6	.010	.050/.055	.100	4.94	.59	.81	.88	ALUMINUM
4-62010-5153	2	10	6	.010	.050/.055	.100	4.94	.59	.81	—	ALUMINUM
4-63015-5153	3	15	6	.014	.060/.065	.100	5.31	.87	1.19	—	ALUMINUM
4-63020-5153	3	20	6	.014	.060/.065	.100	5.31	.87	1.19	—	ALUMINUM

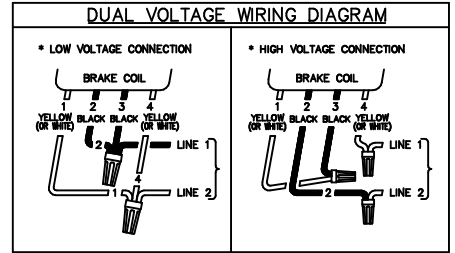

*SEE BULLETIN BK4652 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

* NOTE: WHEN APPLICABLE, TABLE DIMENSIONS ARE REFERENCED FROM THE BRAKE MOUNTING FACES AND DO NOT INCLUDE THE GASKET THICKNESSES.

*** 2-PIECE SHAFT DESIGNS ARE USED FOR TORQUES UP TO AND INCLUDING 6 LB.FT. ONLY.

OUTLINE DRAWING, DOUBLE C FACE BRAKE NEMA 4 ENCLOSURE (S65153)

TOLERANCE UNLESS OTHERWISE NOTED
 DIMENSIONS IN INCHES
 UNLESS OTHERWISE SPECIFIED

DESIGNED BY: []
 DRAWN BY: []
 CHECKED BY: []
 DATE: 6-7-00
 SCALE: FULL

REVISED BY: []
 DATE: []
 REASON: []

DATE: []
 TIME: []

CAD FILE L060392

L060392