

**LOCATING DIMENSION FOR MOUNTING HUB TO MOTOR SHAFT—SEE INSTALLATION INSTRUCTIONS.


****INCLUDED IN PARTS PACKAGE

MODEL NUMBER	NUMBER OF ROTATING DISCS	TORQUE LB.FT.	THERMAL CAPACITY HPS/MIN.	INERTIA OF ROTATING PARTS LB.FT. ²	MAGNET AIR GAP		DIMENSIONS				ENCLOSURE MATERIAL
					ORIGINAL SETTING	MAXIMUM	C*	AC*	X ONE PIECE SHAFT	***X TWO PIECE SHAFT	
6-61001-5155	1	1.5	6	.006	.045/.050	.100	4.94	.59	.81	.88	ALUMINUM
6-61003-5155	1	3	6	.006	.045/.050	.100	4.94	.59	.81	.88	ALUMINUM
6-62006-5155	2	6	6	.010	.050/.055	.100	4.94	.59	.81	.88	ALUMINUM
6-62010-5155	2	10	6	.010	.050/.055	.100	4.94	.59	.81	—	ALUMINUM
6-63015-5155	3	15	6	.014	.060/.065	.100	5.31	.87	1.19	—	ALUMINUM
6-63020-5155	3	20	6	.014	.060/.065	.100	5.31	.87	1.19	—	ALUMINUM

* NOTE: WHEN APPLICABLE, TABLE DIMENSIONS ARE REFERENCED FROM THE BRAKE MOUNTING FACES AND DO NOT INCLUDE THE GASKET THICKNESSES.

*** 2-PIECE SHAFT DESIGNS ARE USED FOR TORQUES UP TO AND INCLUDING 6 LB.FT. ONLY.

— EXTERNAL ENCLOSURE SURFACES PAINTED WITH BISSC APPROVED WHITE EPOXY PAINT. WINDOW CAPS AND HARDWARE MADE OF STAINLESS STEEL.

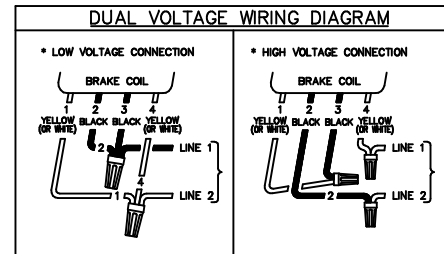

*SEE BULLETIN BK4646 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

OUTLINE DRAWING, DOUBLE C FACE NEMA 4X ENCLOSURES (S65155)		 DYNAMICS MANUFACTURING DIV.	REV. NO.	DATE	BY	REVISION	DRAWING NO.	REV. NO.
TOLERANCE UNLESS OTHERWISE NOTED	DIMENSIONS 2 - UNLESS A - UNLESS A - UNLESS A -							
DESIGNED BY	CHECKED BY							
DRAWN BY	DATE							
SCALE	SIZE							
DATE	FILE							
CAD FILE L060397								

L060397