


**** (4) MOUNTING HOLES EQUALLY SPACED FOR 3/8"-16 THREADED STUDS, LOCKWASHERS AND NUTS (FOR MTG. THROUGH BRAKE TO MOTOR). STUDS MAY BE SHORTENED IF NO ADDITIONAL EQUIPMENT IS TO BE MOUNTED TO THE BRAKE FACE.

**LOCATING DIMENSION FOR MOUNTING HUB TO MOTOR SHAFT—SEE INSTALLATION INSTRUCTIONS.

****INCLUDED IN PARTS PACKAGE

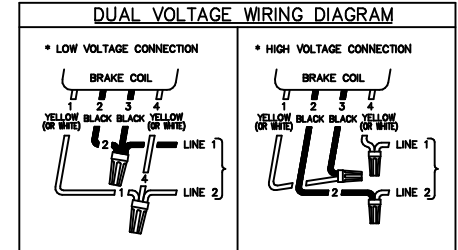

*SEE BULLETIN BK4650 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

MODEL NUMBER	NUMBER OF ROTATING DISCS	TORQUE LB.-FT.	THERMAL CAPACITY HPS/MIN.	INERTIA OF ROTATING PARTS LB.-FT. ²	MAGNET AIR GAP		DIMENSIONS				ENCLOSURE MATERIAL
					ORIGINAL SETTING	MAXIMUM	C	AC	X ONE PIECE SHAFT	***X TWO PIECE SHAFT	
2-61001-551	1	1.5	6	.006	.045/.050	.100	4.94	.59	.81	.88	ALUMINUM
2-61003-551	1	3	6	.006	.045/.050	.100	4.94	.59	.81	.88	ALUMINUM
2-62006-551	2	6	6	.010	.050/.055	.100	4.94	.59	.81	.88	ALUMINUM
2-62010-551	2	10	6	.010	.050/.055	.100	4.94	.59	.81	—	ALUMINUM
2-63015-551	3	15	6	.014	.060/.065	.100	5.31	.87	1.19	—	ALUMINUM
2-63020-551	3	20	6	.014	.060/.065	.100	5.31	.87	1.19	—	ALUMINUM

*** 2-PIECE SHAFT DESIGNS ARE USED FOR TORQUES UP TO AND INCLUDING 6 LB.-FT. ONLY.

THIS MATERIAL IS PROPERTY OF DISCO COMPANY. NO RIGHTS ARE GRANTED TO USE SUCH MATERIAL FOR ANY PURPOSE OTHER THAN (1) PRODUCT EVALUATION OR MAINTENANCE OR (2) THE FURNISHING OF SERVICES AND SUPPLIES TO THE DISCO COMPANY.

OUTLINE DRAWING, 60 SERIES
DOUBLE "C" FACE, S6551

TOLERANCE UNLESS OTHERWISE NOTED
INCHES ± .005
MILLIMETERS ± .025

DESIGNED BY: [Signature]
DRAWN BY: [Signature]
DATE: 6-18-08
SCALE: FULL

DISCO DYNAMICS
MILWAUKEE, WISCONSIN U.S.A.

REV. 10
CAD FILE L060413

L060413