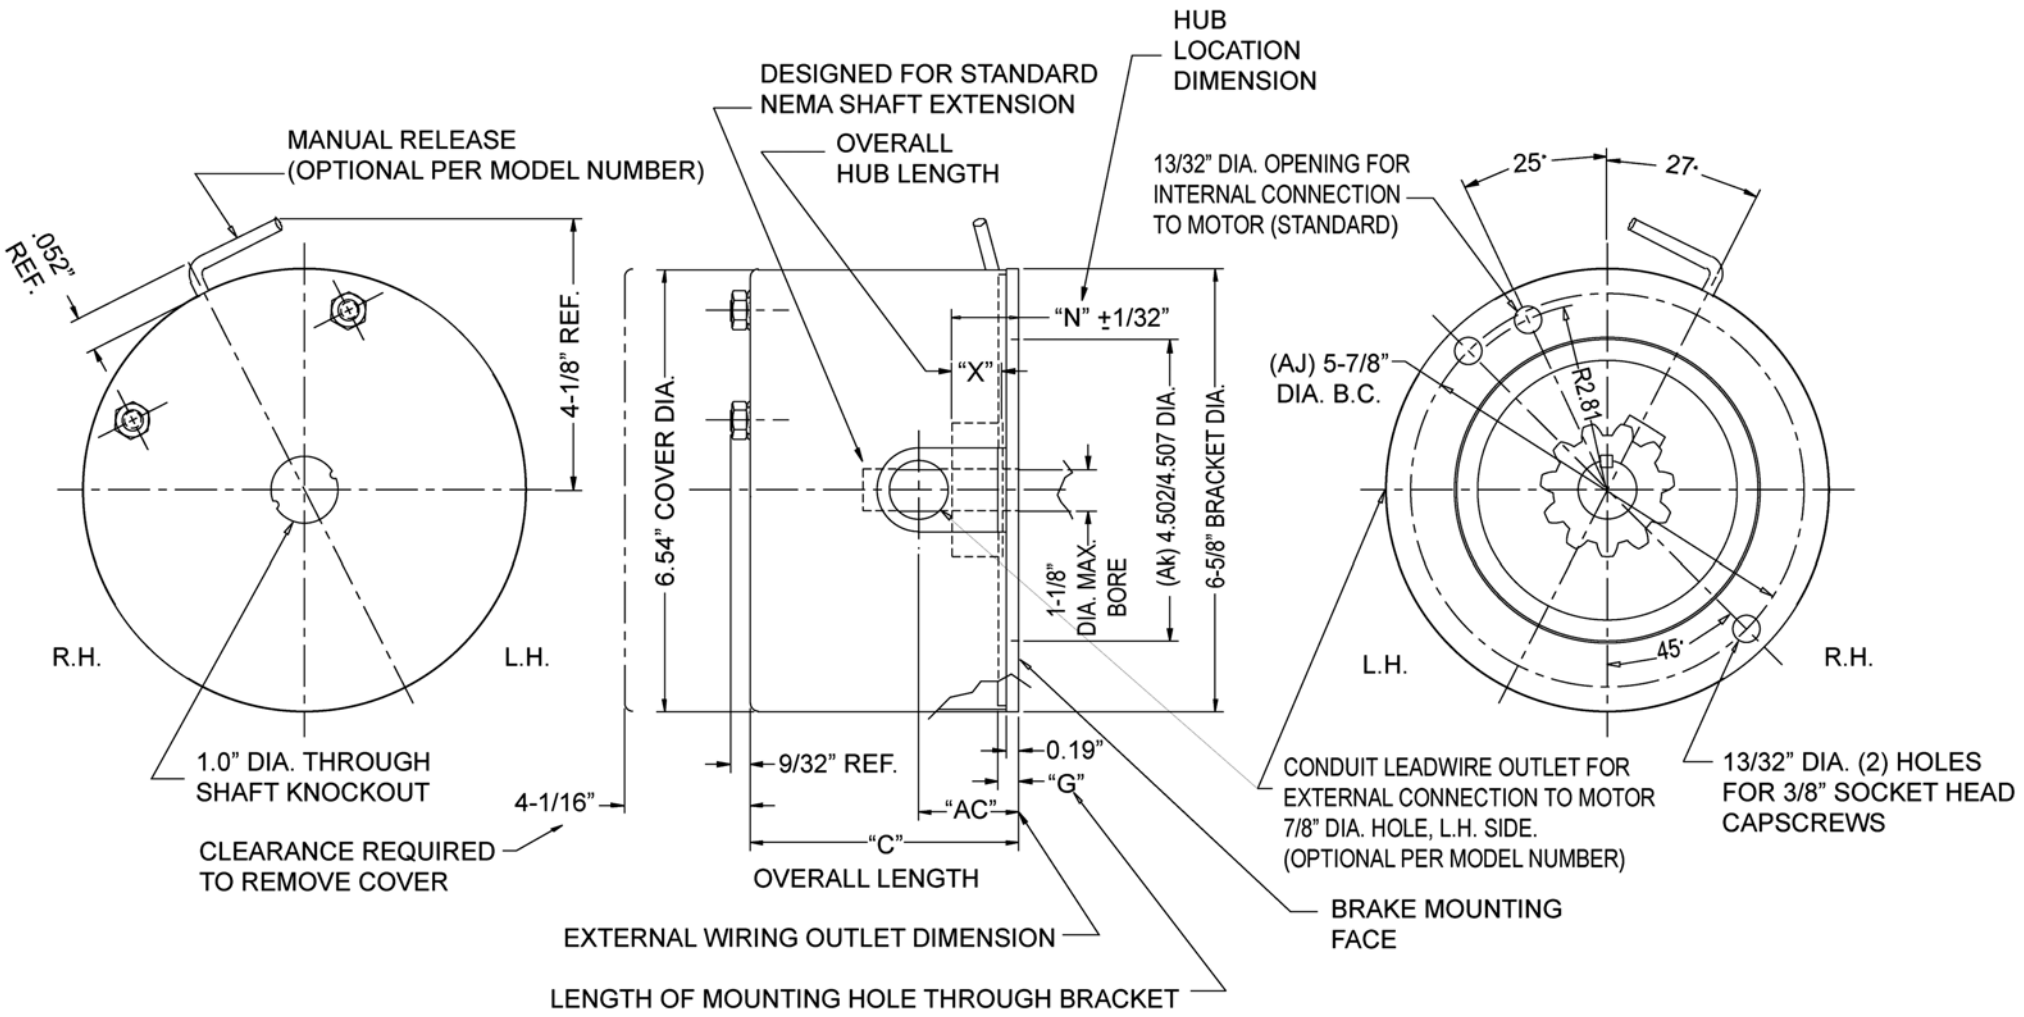
MANUAL RELEASE
(OPTIONAL PER MODEL NUMBER)
.052" REF.
4-1/8" REF.
R.H.
L.H.
1.0" DIA. THROUGH
SHAFT KNOCKOUT
4-1/16"
CLEARANCE REQUIRED
TO REMOVE COVER
DESIGNED FOR STANDARD
NEMA SHAFT EXTENSION
OVERALL
HUB LENGTH
HUB
LOCATION
DIMENSION
"N" ±1/32"
"X"
6.54" COVER DIA.
(Ak) 4.502/4.507 DIA.
6-5/8" BRACKET DIA.
1-1/8"
DIA. MAX.
BORE
9/32" REF.
0.19"
"G"
"AC"
"C"
OVERALL LENGTH
EXTERNAL WIRING OUTLET DIMENSION
LENGTH OF MOUNTING HOLE THROUGH BRACKET
13/32" DIA. OPENING FOR
INTERNAL CONNECTION
TO MOTOR (STANDARD)
25°
27°
(AJ) 5-7/8"
DIA. B.C.
R2.81
L.H.
45°
R.H.
CONDUIT LEADWIRE OUTLET FOR
EXTERNAL CONNECTION TO MOTOR
7/8" DIA. HOLE, L.H. SIDE.
(OPTIONAL PER MODEL NUMBER)
BRAKE MOUNTING
FACE
13/32" DIA. (2) HOLES
FOR 3/8" SOCKET HEAD
CAPSCREWS