


(4) HOLES, EQUALLY SPACED, FOR 1/2 DIA. SOC. HD. CAP SCREW; LENGTH THRU BRACKET= .75"

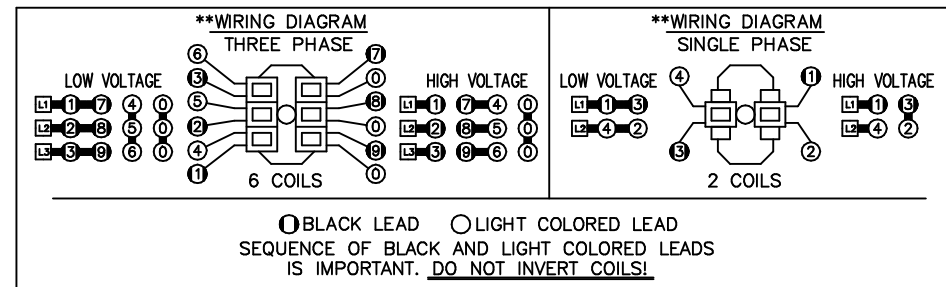

NOTE #1:
THE MAXIMUM SHAFT DIAMETER FOR THIS BRAKE IS 1-5/8". FOR ANY GIVEN SHAFT UP TO AND INCLUDING THIS DIAMETER, STANDARD NEMA SHAFT LENGTHS MAY HAVE TO BE SHORTENED.
* CONSULT FACTORY FOR SPECIFIC DETAILS.

STANDARD HOUSING MODEL	TORQUE LB.FT.	No. OF ROTATING FRICTION DISC	MAX. RPM	THERMAL CAPACITY HPS/MIN.	INERTIA WK ² LB.FT. ²	DIMENSIONS						BRACKET MATERIAL	COVER MATERIAL	
						"C"	"D" ±.005 MAX. ORIGINAL SETTING	"H"	"N" ±1/32"	"X"	"AC"			
6-71010-96	10	1	3600	11	.028	6.00	.060	.035	1.31	1.50	1.00	1.47	CAST IRON	STAMP STEEL
6-71015-96	15	1	3600	11	.028	6.00	.060	.035	1.31	1.50	1.00	1.47	CAST IRON	STAMP STEEL
6-72025-96	25	2	3600	12	.051	6.62	.060	.035	1.31	2.00	1.50	2.09	CAST IRON	STAMP STEEL
6-72035-96	35	2	3600	12	.051	6.62	.060	.040	1.22	2.00	1.50	2.09	CAST IRON	STAMP STEEL
6-73050-96	50	3	3600	13	.075	7.25	.065	.040	1.25	2.50	2.00	2.72	CAST IRON	STAMP STEEL
6-74075-96	75	4	3600	14	.099	7.87	.065	.040	1.22	3.00	2.50	3.34	CAST IRON	STAMP STEEL

SYMBOL KEY:
 "C"= ENCLOSURE LENGTH
 "D"= MAGNET AIR GAP
 "H"= INSTALLED SPRING LENGTH
 "N"= HUB LOCATION DIMENSION
 "X"= OVERALL HUB LENGTH
 "AC"= EXTERNAL WIRING OUTLET DIMENSION

****SEE BULLETIN BK4703 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS**

THIS MATERIAL IS PROPERTY OF DISOR COMPANY. NO RIGHTS ARE GRANTED TO USE SUCH MATERIAL FOR ANY PURPOSE OTHER THAN (1) PRODUCT EVALUATION OR MAINTENANCE OR (2) THE FURNISHING OF SERVICES AND SUPPLIES TO THE DISOR COMPANY.

OUTLINE DRAWING, 70 SERIES BRAKE
2 POST, DEEP DRAWN COVER, NEMA 2 (S7096)

TOLERANCE UNLESS OTHERWISE NOTED
 .005 & .010 FRACTIONS ± V/P
 .015 & .020 HUNDREDS ± P
 .030 & .040 THIRDS ± P
 .050 & .060 SIXTHS ± P
 .075 & .090 TENTHS ± P
 .100 & .125 FULL

DATE: 02/01/99
 REV: 7
 CAD FILE: L070381

DISOR DYNAMICS
 1000 W. BELLEVUE BLVD. S.E.
 BELLEVUE, WA 98004
 TEL: 206.461.1111
 FAX: 206.461.1112