


(4) HOLES, EQUALLY SPACED, FOR 1/2 DIA. SOC. HD. CAP SCREW; LENGTH THRU BRACKET = .75"

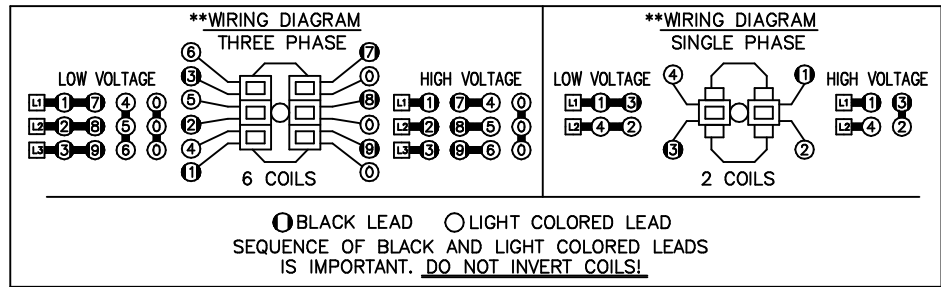

NOTE #1:
THE MAXIMUM SHAFT DIAMETER FOR THIS BRAKE IS 1-5/8". FOR ANY GIVEN SHAFT UP TO AND INCLUDING THIS DIAMETER, STANDARD NEMA SHAFT LENGTHS MAY HAVE TO BE SHORTENED.
* CONSULT FACTORY FOR SPECIFIC DETAILS.

STANDARD HOUSING MODEL	TORQUE LB.FT.	No. OF ROTATING FRICTION DISCS	MAX. RPM	THERMAL CAPACITY HPS/MIN.	INERTIA WK ² LB.FT. ²	DIMENSIONS						BRACKET MATERIAL	COVER MATERIAL	
						"C"	"D" ±.005		"H"	"N" ±1/32	"X"			"AC"
							MAX.	ORIGINAL SETTING						
6-71010-97	10	1	3600	11	.028	6.00	.060	.035	1.31	1.50	1.00	1.47	CAST IRON	STAMP STEEL
6-71015-97	15	1	3600	11	.028	6.00	.060	.035	1.31	1.50	1.00	1.47	CAST IRON	STAMP STEEL
6-72025-97	25	2	3600	12	.051	6.62	.060	.035	1.31	2.00	1.50	2.09	CAST IRON	STAMP STEEL
6-72035-97	35	2	3600	12	.051	6.62	.065	.040	1.22	2.00	1.50	2.09	CAST IRON	STAMP STEEL
6-73050-97	50	3	3600	13	.075	7.25	.065	.040	1.25	2.50	2.00	2.72	CAST IRON	STAMP STEEL
6-74070-97	70	4	3600	14	.099	7.87	.065	.040	1.22	3.00	2.50	3.34	CAST IRON	STAMP STEEL

SYMBOL KEY: "C" = ENCLOSURE LENGTH
"D" = MAGNET AIR GAP
"H" = INSTALLED SPRING LENGTH
"N" = HUB LOCATION DIMENSION
"X" = OVERALL HUB LENGTH
"AC" = EXTERNAL WIRING OUTLET DIMENSION

**SEE BULLETIN BK4705 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

THIS MATERIAL IS PROPERTY OF DORR COMPANY. NO RIGHTS ARE GRANTED TO USE SUCH MATERIAL FOR ANY PURPOSE OTHER THAN (1) PRODUCT EVALUATION OR MAINTENANCE OR (2) THE FURNISHING OF SERVICES AND SUPPLIES TO THE DORR COMPANY.

OUTLINE DRAWING, 70 SERIES STD HOUSING, NEMA 2 4 POST, DEEP DRAWN COVER (S7087)

TOLERANCE UNLESS OTHERWISE NOTED
DIMENSIONS IN INCHES
DIMENSIONS IN MILLIMETERS

DESIGNED BY: [] DRAWN BY: []
CHECKED BY: [] DATE: []

REVISED: [] DATE: [] BY: [] REASON: []

CAD FILE: L070383

DORR DYNAMICS
11/23/89
L070383 1 of 1