



1/2" NPT LEADWIRE OUTLET FOR EXTERNAL CONNECTION TO MOTOR. BRAKE CAN BE ROTATED TO (4) 90° POSITIONS.

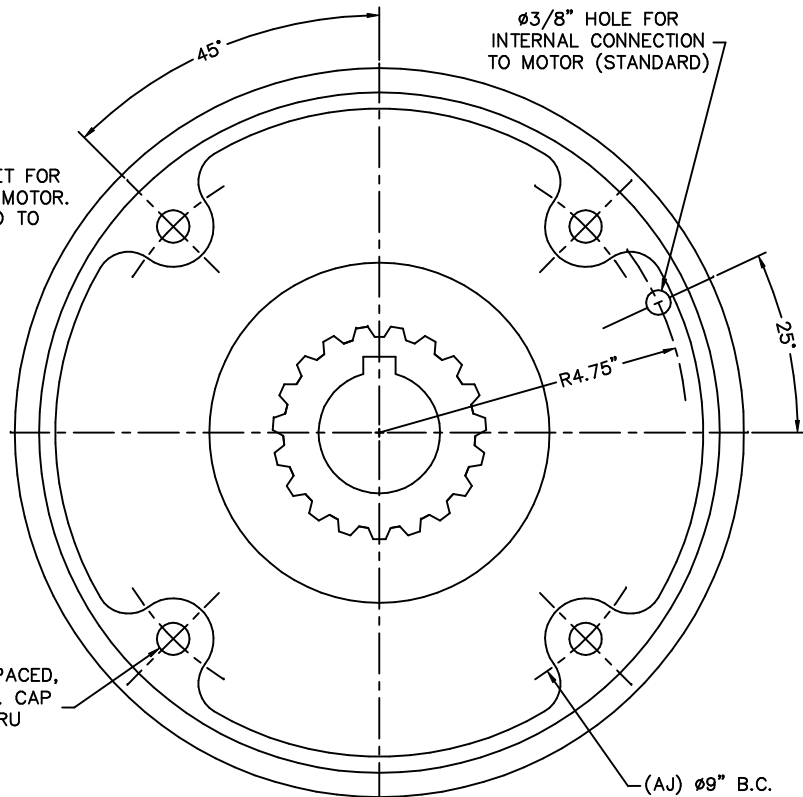

(4) HOLES, EQUALLY SPACED, FOR 1/2 DIA. SOC. HD. CAP SCREW: LENGTH THRU BRACKET = 1"

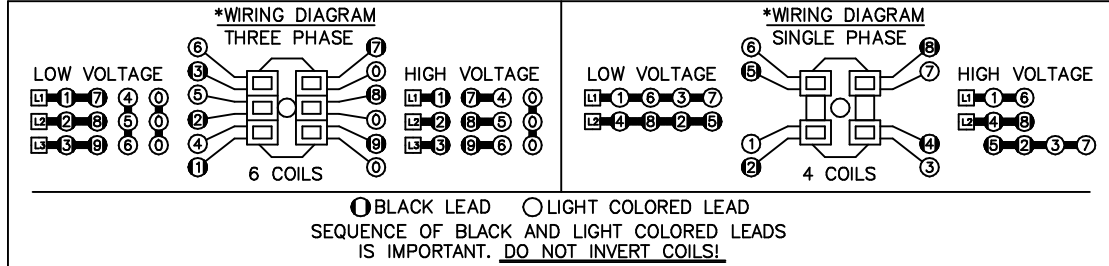

MODEL NUMBER	TORQUE LB.FT.	No. OF ROTATING FRICTION DISC	MAX. RPM	THERMAL CAPACITY HPS/MIN.	INERTIA WK ² LB.FT. ²	DIMENSIONS						BRACKET MATERIAL	COVER MATERIAL	
						"C"	"D" ±.005	"H"	"N"	"X"	"AC"			
						MAX.	MAX. ORIGINAL SETTING	±1/32						
R81025	25	1	2400	15	.084	6.00	.065	.040	1.28	1.75	1.00	1.72	CAST IRON	CAST ALUMINUM
R81035	35	1	2400	15	.084	6.00	.065	.040	1.28	1.75	1.00	1.72	CAST IRON	CAST ALUMINUM
R82050	50	2	2400	17	.158	6.62	.065	.040	1.28	2.25	1.50	2.34	CAST IRON	CAST ALUMINUM
R82070	70	2	2400	17	.158	6.62	.065	.040	1.28	2.25	1.50	2.34	CAST IRON	CAST ALUMINUM
R83075	75	3	2400	19	.233	7.25	.070	.045	1.28	2.75	2.00	2.97	CAST IRON	CAST ALUMINUM
R83105	105	3	2400	19	.233	7.25	.070	.045	1.28	2.75	2.00	2.97	CAST IRON	CAST ALUMINUM
R84125	125	4	2400	21	.307	7.87	.080	.055	1.37	3.25	2.50	3.59	CAST IRON	CAST ALUMINUM
R85175	175	5	2400	21	.384	8.50	.080	.055	1.28	3.87	3.12	4.22	CAST IRON	CAST ALUMINUM

SYMBOL KEY:
 "C" = ENCLOSURE LENGTH
 "D" = MAGNET AIR GAP
 "H" = INSTALLED SPRING LENGTH
 "N" = HUB LOCATION DIMENSION
 "X" = OVERALL HUB LENGTH
 "AC" = EXTERNAL WIRING OUTLET DIMENSION

*SEE BULLETIN BK4803 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

THIS MATERIAL IS PROPERTY OF DISCO COMPANY. NO RIGHTS ARE GRANTED TO USE SUCH MATERIAL FOR ANY PURPOSE OTHER THAN (1) PRODUCT EVALUATION OR MAINTENANCE OR (2) THE FURNISHING OF SERVICES AND SUPPLIES TO THE DISCO COMPANY.

OUTLINE DRAWING, 80 SERIES
 NEMA 2 ENCLOSURE; 2 POST (S8000)

DISCO DYNAMICS
 7-13-08
 L080215