



1/2" NPT LEADWIRE OUTLET FOR EXTERNAL CONNECTION TO MOTOR. BRAKE CAN BE ROTATED TO (4) 90° POSITIONS.

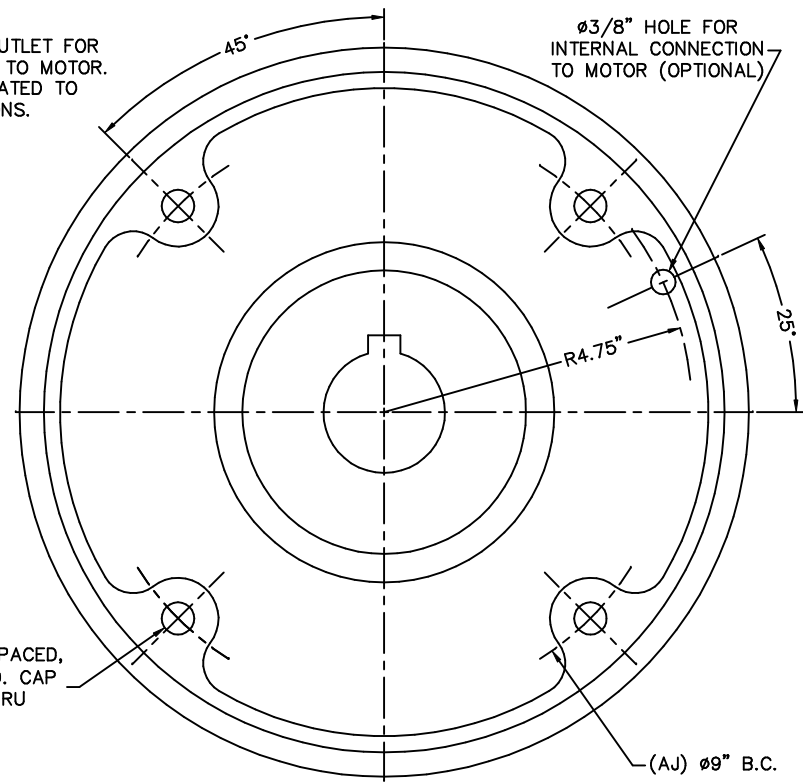

(4) HOLES, EQUALLY SPACED, FOR 1/2 DIA. SOC. HD. CAP SCREW: LENGTH THRU BRACKET = 1"

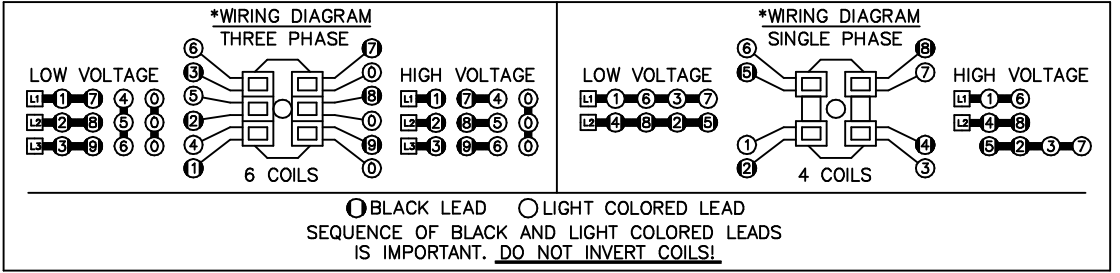

*SEE BULLETIN BK4813 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

MODEL NUMBER	TORQUE LB.FT.	No. OF ROTATING DISC	MAX. RPM	THERMAL CAPACITY HPS/MIN.	INERTIA WK ² LB.FT. ²	DIMENSIONS							ENCLOSURE MATERIAL
						"C"	"D" ±.005		"H"	"N" ±1/32	"X"	"AC"	
							MAX.	ORIGINAL SETTING					
R81025-4	25	1	2400	15	.095	6.00	.065	.040	1.28	1.75	1.31	1.72	CAST IRON
R81035-4	35	1	2400	15	.095	6.00	.065	.040	1.28	1.75	1.31	1.72	CAST IRON
R82050-4	50	2	2400	17	.169	6.62	.065	.040	1.28	2.25	1.81	2.34	CAST IRON
R82070-4	70	2	2400	17	.169	6.62	.065	.040	1.28	2.25	1.81	2.34	CAST IRON
R83075-4	75	3	2400	19	.244	7.25	.070	.045	1.28	2.75	2.31	2.97	CAST IRON
R83105-4	105	3	2400	19	.244	7.25	.070	.045	1.28	2.75	2.31	2.97	CAST IRON
R84125-4	125	4	2400	21	.318	7.87	.080	.055	1.37	3.25	2.81	3.59	CAST IRON
R85175-4	175	5	2400	21	.395	8.50	.080	.055	1.28	3.87	3.44	4.22	CAST IRON

SYMBOL KEY:
 "C" = ENCLOSURE LENGTH
 "D" = MAGNET AIR GAP
 "H" = INSTALLED SPRING LENGTH
 "N" = HUB LOCATION DIMENSION
 "X" = OVERALL HUB LENGTH
 "AC" = EXTERNAL WIRING OUTLET DIMENSION

THIS MATERIAL IS PROPERTY OF DISCO COMPANY. NO RIGHTS ARE GRANTED TO USE THIS MATERIAL FOR ANY PURPOSE OTHER THAN (1) PRODUCT EVALUATION OR MAINTENANCE OR (2) THE FURNISHING OF SERVICES AND SUPPLIES TO THE DISCO COMPANY.

OUTLINE DRAWING, 80 SERIES
 NEMA 4; 2 POST (S8004)

TOLERANCE UNLESS OTHERWISE NOTED
 .001 & .002 FRACTIONS & .001 & .002 DECIMALS
 .005 & .010 HOLE & .010

DATE: 7-13-08
 REV: 001
 DESIGNED BY: [Signature]
 CHECKED BY: [Signature]
 DRAWN BY: [Signature]

DISCO DYNAMICS
 1000 W. BELLEVUE BLVD. S.E.
 ALABAMA CITY, AL 35005

REV. NO. 1
 CAD FILE: L080216

A	2248	8-16-08	DMR	UPDATE DRAWING, SEE CHANGE NOTE.
REV	CHG	DATE	BY	REVISION

L080216