



1/2" NPT LEADWIRE OUTLET FOR EXTERNAL CONNECTION TO MOTOR. BRAKE CAN BE ROTATED TO (4) 90° POSITIONS.

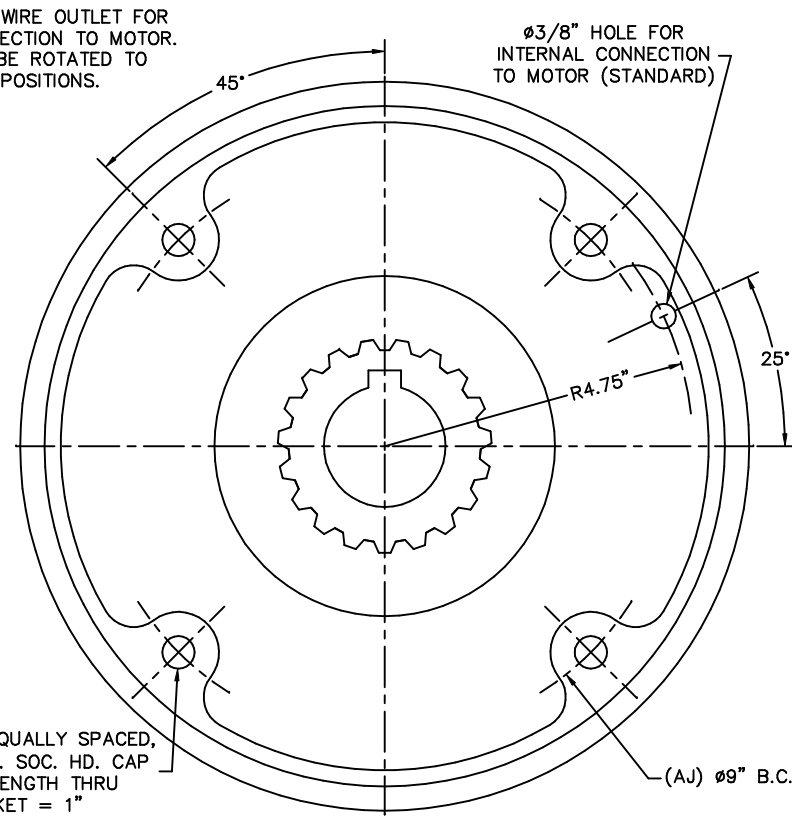

(4) HOLES, EQUALLY SPACED, FOR 1/2 DIA. SOC. HD. CAP SCREW: LENGTH THRU BRACKET = 1"

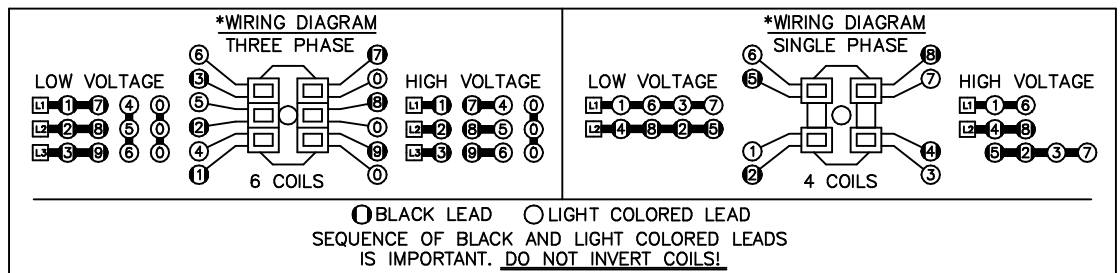

MODEL NUMBER	TORQUE LB.FT.	THERMAL CAPACITY HPS/MIN	INERTIA WK <sup>2</sup> LB.FT. <sup>2</sup>	DIMENSIONS							BRACKET MATERIAL	COVER MATERIAL
				"C"	"X"	±1/32 "N"	"H"	"AC"	MAX. "D"	ORIGINAL SETTING		
6-81025-58	25	15	.084	6.25	1.00	1.75	1.31	1.51	.065	.040	CAST IRON	STAMP STEEL
6-81035-58	35	15	.084	6.25	1.00	1.75	1.31	1.51	.065	.040	CAST IRON	STAMP STEEL
6-82050-58	50	17	.158	6.87	1.50	2.25	1.31	2.13	.065	.040	CAST IRON	STAMP STEEL
6-82070-58	70	17	.158	6.87	1.50	2.25	1.31	2.13	.065	.040	CAST IRON	STAMP STEEL
6-83075-58	75	19	.233	7.50	2.00	2.75	1.31	2.76	.070	.045	CAST IRON	STAMP STEEL
6-83105-58	105	19	.233	7.50	2.00	2.75	1.31	2.76	.070	.045	CAST IRON	STAMP STEEL
6-84125-58	125	21	.307	8.12	2.50	3.25	1.43	3.38	.080	.055	CAST IRON	STAMP STEEL
6-85175-58	175	21	.384	8.75	3.12	3.87	1.31	3.38	.080	.055	CAST IRON	STAMP STEEL

**SYMBOL KEY:**  
 "C" = ENCLOSURE LENGTH  
 "D" = MAGNET AIR GAP  
 "H" = INSTALLED SPRING LENGTH  
 "N" = HUB LOCATION DIMENSION  
 "X" = OVERALL HUB LENGTH  
 "AC" = EXTERNAL WIRING OUTLET DIMENSION

\*SEE BULLETIN BK4804 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

THIS MATERIAL IS PROPERTY OF DISCO COMPANY. NO RIGHTS ARE GRANTED TO USE SUCH MATERIAL FOR ANY PURPOSE OTHER THAN (1) PRODUCT EVALUATION OR MAINTENANCE OR (2) THE FURNISHING OF SERVICES AND SUPPLIES TO THE DISCO COMPANY.

OUTLINE DRAWING, 80 SERIES, NEMA 2 DEEP DRAWN COVER, 4 POST (S8058)

TOLERANCE UNLESS OTHERWISE NOTED  
 .005 & .010 FRACTIONS ± .001  
 .01 & .02 HUNDREDS ± .001  
 .03 & .05 THIRDS ± .001

DATE: 12/07/99  
 DESIGNED BY: [Signature]  
 CHECKED BY: [Signature]  
 DRAWING NO: L080225  
 SHEET NO: 1 OF 1