

**** (4) MOUNTING HOLES EQUALLY SPACED FOR 3/8"-16 THREADED STUDS, LOCKWASHERS AND NUTS (FOR MTG. THROUGH BRAKE TO MOTOR). STUDS MAY BE SHORTENED IF NO ADDITIONAL EQUIPMENT IS TO BE MOUNTED TO THE BRAKE FACE.


**LOCATING DIMENSION FOR MOUNTING HUB TO MOTOR SHAFT—SEE INSTALLATION INSTRUCTIONS.

****INCLUDED IN PARTS PACKAGE

MODEL NUMBER	NUMBER OF ROTATING DISCS	TORQUE LB.FT.	THERMAL CAPACITY HPS/MIN.	INERTIA OF ROTATING PARTS LB.FT. ²	MAGNET AIR GAP		DIMENSIONS				ENCLOSURE MATERIAL
					ORIGINAL SETTING	MAXIMUM	C*	AC*	X ONE PIECE SHAFT	**X TWO PIECE SHAFT	
6-61001-5145	1	1.5	6	.006	.045/.050	.100	5.07	0.63	.81	.88	316 STAINLESS STEEL
6-61003-5145	1	3	6	.006	.045/.050	.100	5.07	0.63	.81	.88	316 STAINLESS STEEL
6-62006-5145	2	6	6	.010	.050/.055	.100	5.07	0.63	.81	.88	316 STAINLESS STEEL
6-62010-5145	2	10	6	.010	.050/.055	.100	5.07	0.63	.81	.88	316 STAINLESS STEEL
6-63015-5145	3	15	6	.014	.060/.065	.100	5.44	0.94	1.19	—	316 STAINLESS STEEL
6-63020-5145	3	20	6	.014	.060/.065	.100	5.44	0.94	1.19	—	316 STAINLESS STEEL

* NOTE: WHEN APPLICABLE, TABLE DIMENSIONS ARE REFERENCED FROM THE BRAKE MOUNTING FACES AND DO NOT INCLUDE THE GASKET THICKNESSES.

*** 2-PIECE SHAFT DESIGNS ARE USED FOR TORQUES UP TO AND INCLUDING 6 LB.FT. ONLY.

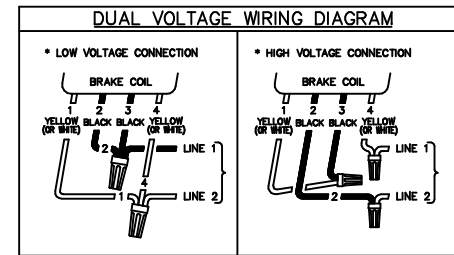

*SEE BULLETIN BK4651 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

OUTLINE DRAWING, DOUBLE C FACE BRAKE NEMA 4X STNLT. ENCLOSURE (S65145)

TOLERANCE UNLESS OTHERWISE NOTED

REV. 2 - 6-10-08

DESIGNED BY: [Signature]

DRAWN BY: [Signature]

CHECKED BY: [Signature]

DATE: 6-10-08

SCALE: FULL

ISSUE NO. 1

CAD FILE L060385

DRIVING IN: L060385

REV. 14